

Via Lago di Molveno, 20 36015 SCHIO (VI) ITALY

TEL. +39 0445 661722 FAX+39 0445 661792

Website: http://www.elco-italy.com e-mail: info@elco-italy.com support@elco-italy.com

# **TSEN-RT**



# **Converter/Isolator**

# **User Manual**

# Translation of the original instructions

# TSENRT-GB-01-04-A

General information	
Intended use	2
Intended recipients of the manual	2
Warranty	2
Description of the signal converter Converter/Isolator TSEN-RT	
Areas of use	3
Applications	
Technical data Converter/Isolator TSEN-RT	3
Overall dimensions (mm)	5
Installation	
Connections	6
Use	6
Signaling LEDs	6
Programming the Converter/Isolator TSEN-RT	
Configuration via PC	
Configuration via ELCO TSE WI-FI	
Setting via DIP Switch	
Ordering data	

### GENERAL INFORMATION

This instruction manual is an integral part of the Converter/Isolator TSEN-RT and users should always make reference to it.

- The signal converter Converter/Isolator TSEN-RT, also referred herein as "product" or "device", to which this document refers, is provided for use by persons trained in its use. The instruction must provide for the knowledge of the product and of the maneuvers to be performed during the use, to allow its use in safe conditions.
- All persons trained to work with the product should carefully read this manual in all its sections and understand its contents.
- It is especially important that staff are informed on security with regard to general practices for the protection of people, the product and the surrounding environment.
- Only the correct use of the product as recommended will ensure its lasting and effective use, in full safety for the operators and for the product itself.
- EL.CO. S.r.l. reserves the right to make any formal or functional changes at any time without prior notice.
- The electrical installation where the component is installed must meet the safety requirements in force.
- EL.CO. S.r.l. and its legal representatives do not assume any responsibility for any damage to people, things or animals deriving from violation, misuse, wrong use or otherwise not in accordance with the device features.
- All rights to this documentation are reserved. Translations, reprints and copies of this manual, even if partial and/or otherwise expressly require the consent of EL.CO. S.r.l.

### INTENDED USE

The Converter/Isolator TSEN-RT may only be used in the following applications:

Linearization and conversion of analog signals by thermal resistor, resistors, potentiometer, PTC and NTC.

Any other use of the product s not allowed and it is considered improper and therefore dangerous. EL.CO. S.r.l. shall not be liable in any way for damage to persons or property that could occur due to improper use.

### Intended recipients of the manual

- This manual is intended for all authorized users and suitable to use the Converter/Isolator.
- All users must read and understand the contents of this manual, which they have to follow while working with the product.
- This manual is an integral part of the product to which it relates and shall be kept throughout its life cycle.
- In case of transfer or sale of the product, the manual and all accompanying documentation, or connected one, shall be maintained and delivered with it.

### WARRANTY

The warranty provided by the manufacturer on the product is valid for one year. The following conditions will void the product warranty provided by EL.CO. S.r.l.:

- Improper use of the product, which is different than the expected one, as described in section Intended use Intended use;
- Use by unauthorized or untrained personnel;
- Total or partial disregard of these instructions;
- Power supply defects;
- Pollution coming from the outside;
- Changes and unauthorized repairs.

### DESCRIPTION OF THE SIGNAL CONVERTER CONVERTER/ISOLATOR TSEN-RT

The Converter/Isolator TSEN-RT converts and insulates, with high accuracy, an analog signal from thermal resistor, resistor, potentiometer, PTC and NTC isolating it in output in voltage or current. The output signal may be direct or inverse. The device is galvanically isolated on the three ways (input, output and power supply). This is a good protection against interference encountered in industrial environments. The device is fully programmable through the software or via the DIP Switch. The type of input, the burnout function and junction compensation on temperature measurements, the scale range and output in mA or V are programmable via software ELCO TSE-CONF or via DIP switches. The device is housed in a sturdy plastic container, whose thickness is 7.5 mm, suitable for mounting on DIN rails.

- Configurable input for thermal resistor, resistor, potentiometer, PTC and NTC
- Configurable output in voltage or current
- Power supply 18 ... 30 Vdc and 20 ... 28 Vac
- Maximum versatility with programming via PC
- High precision and speed
- A/D converter controlled by a microprocessor

- Reduced absorption
- Isolation on three ways
- High accuracy (0.1%)
- 14-bit measurement conversion
- Voltage presence LED (blue) and off-scale (red) indicator
- Simplified installation with DIN rail mounting
- Extremely compact size (7.5mm thick)
- Programming with software ELCO TSE-CONF and programmerELCO TSE-USB or ELCO TSE-WIFI without the need for external wiring or alternatively via DIP Switch
- EMC compatibility meeting EN 50022 and EN 50035

# Areas of use

• Energy, Control Panels, Food Industry


# **Applications**

- Conversion and isolation of temperature signals
- Reduction of space in control cabinets

TECHNICAL DATA CONVERTER/ISOLA	TOR TSEN-RT		
POWER SUPPLY	1830 Vdc; 2028 Vac Protection against reverse polarity 60Vdc max.		
CURRENT CONSUMPTION	50 mA max		
ABSORPTION	2 W (max)		
SENSORS POWER	yes		
RESPONSE TIME	35 ms		
ACCURACY CLASS	0.1%		
INSULATION	1500 Vrms 1 minute on all ways		
OPERATING TEMPERATURE	-20°C+70 °C		
STORAGE TEMPERATURE	-40 °C+85 °C		
HUMIDITY	0 90% non-condensing		
MATERIAL	Self-extinguishing plastic		
PROTECTION DEGREE	IP 20		
WEIGHT	approx. 50 grams		
CONNECTIONS	Screw terminals and cables applicable up to 2.5 mm <sup>2</sup>		
DIMENSIONS (W x H x D)	90 x 112 x 7.5 mm		
ASSEMBLY	on T35 DIN rail according to EN 50022		
EMC (for industrial environments)	EN 61000-6-2 (Immunity); EN 61000-6-4 (Emission)		
LINEARITY			
Thermal resistor	± 0.1% F.S.		
PTC	± 0.1% F.S.		
NTC	± 0.1% F.S.		
SENSOR EXCITATION CURRENT	<1 mA		
INFLUENCE of LINE RESISTANCE			
3-wire thermal resistor	$0.05\%/\Omega$ (50 $\Omega$ max, balanced)		
4-wire thermal resistor	$0,005\%/\Omega$ (100 $\Omega$ max, bilanced)		
THERMAL DRIFT			
Full-scale	± 0.01%/°C		
CONFIGURATION	ELCO TSE-CONF		
CALIBRATION (referred to the input span)			
Thermal resistor	the greater of ± 0.1% and ± 0.2°C		
Resistor	the greater of ± 0.1% and ± 0.15°C		
Potentiometer	± 0.05% F.S.		

PTC	the greater of ± 0.1% , full scale			
NTC	the greater of ± 0.1% , full scale			
OUTPUT CALIBRATION				
Current	± 7 μA			
Voltage	± 5 mV			
AUXILIARY VOLTAGE	>12 V @ 20 mA			
OVER RANGE VALUES				
Output value with input > full scale	22 mA and/or 10,5 V			
Output value with input > initial scale	2 mA and/or 10,5 V			
VALUES of WIRE BREAK or INPUT OVERLOAD				
Output value	24 mA or 11V			
(NOTE: the values shown are those set by the manufacturer. On request it is possible to set the value of WIRE BREAK and output with input > full scale at 0 mA)				
LOAD RESISTANCE on OUTPUT - Rload				
Current output	<500 Ω			
Voltage output	>10 kΩ			
Short-circuit current	30 mA max			

INPUT TYPES and RANGES		
THERMAL RESISTOR (2, 3, 4-wire program	mable full scale start-bottom)	
PT 100	-200 ÷ +850 °C	minimum SPAN 50 °C
PT 1000	-85 ÷ +185 °C	minimum SPAN 30 °C
NI 100	-60 ÷ +180 °C	minimum SPAN 50 °C
NIFE 604	-60 ÷ +200 °C	minimum SPAN 30 °C
RESISTOR (2, 3, 4-wire programmable initial/full scale)		
	0400 Ω	min. SPAN 50 Ω
	02000 Ω	min. SPAN 50 Ω
POTENTIOMETER (programmable initial/f	ull scale)	
	0100%	minimum SPAN 10%
PTC (programmable initial/full scale)		
KTY81-121	-55 ÷ 130 °C	minimum SPAN 50 °C
NTC (programmable initial/full scale)		
102 AT-2	5 ÷ 95 °C	minimum SPAN 50 °C
CURRENT		
OUPUT (programmable initial/full scale)		
	020 mA	min. SPAN 4 mA
	200 mA	min. SPAN 4 mA
	420 mA	min. SPAN 4 mA
	204 mA	min. SPAN 4 mA
VOLTAGE (programmable full scale)		
	010 V	min. SPAN 1 V
	100 V	min. SPAN 1 V
	05 V	min. SPAN 1 V
	50 V	min. SPAN 1 V



# Overall dimensions (mm)




Figure 1- Overall dimensions

# INSTALLATION

The device is suitable for mounting on DIN rails in the vertical position. For reliable operation and long life, follow the following guidelines:

- Do not allow the ventilation slots are obstructed by cable ducts or other objects close to them
- Avoid the mounting of the devices above equipment generating heat
- Install the device in a place without vibrations;

# Connections

Make the connections according to the following diagrams (Figure 2-). Meet the following conditions:

- Use shielded cables and connect the shield to a ground terminal dedicated to the equipment.
- The cables must not be in the vicinity of cables for power installations as inverters, motors, induction furnaces and the like.

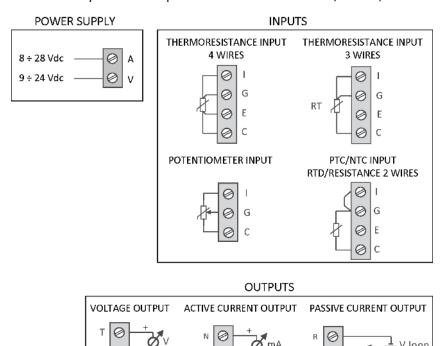


Figure 2- Connections

# Use

Please refer to Connections and Figure 2-.

The device must be powered with a DC/AC voltage applied between the A and V terminals. The analog channel acquires the value from the sensor connected to the I, G, E, C terminals and transmits the output measure on the N, P, R and T terminals.

The device can be powered with DC voltage (8 to 28 Vdc) or with alternating voltage (9 to 24 Vac).

# BLUE LED - PS (power supply) ON Proper power OFF Device not powered Flashing Device under calibration (reserved) RED LED - OL (out of scale) ON Device out of scale (Overload) OFF Proper device range

## Programming the Converter/Isolator TSEN-RT


### **Configuration via PC**


The configuration is done through the software ELCO TSE-CONF and the programmer ELCO TSE-USB as follows.

- 1- Open the protection plastic door on the front of the device
- 2- Connect the controller to the PC and the device with a USB-micro USB cable m/m
- 3- The programmer is powered directly from the PC
- 4- Open the configuration program
- 5- When scanning is enabled , the configuration software ELCO TSE-CONF will automatically detect the connected device
- 6- Set the programming data
- 7- Press the buttons dedicated to read/write data to the device.



Do not disconnect the device during the programming procedure

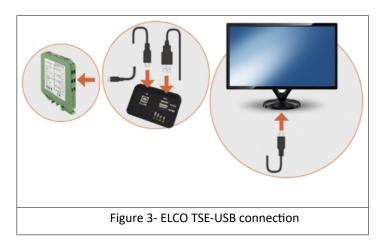

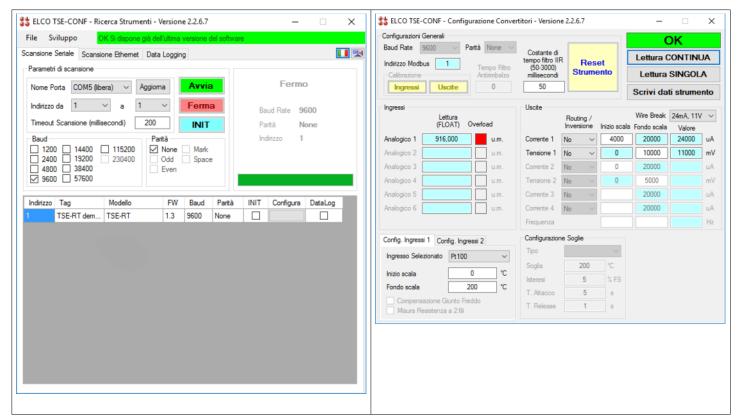


Also refer to the manual for the configuration software.


### **Configuration via ELCO TSE WI-FI**

- 1- The programmer is powered directly from its internal battery
- 2- Open the configuration program
- 3- When scanning is enabled, the configuration software ELCO TSE-CONF will automatically detect the connected device
- 4- Set the programming data
- 5- Press the buttons dedicated to read/write data to the device




Do not disconnect the device during the programming procedure

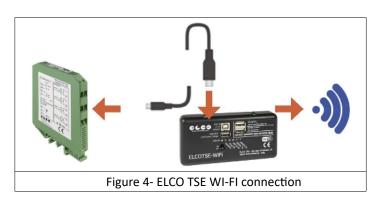

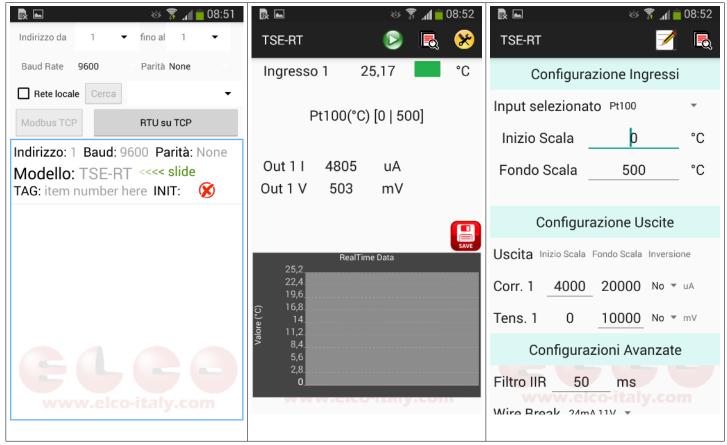

Also refer to the manual for the configuration software.

### **Setting via DIP Switch**

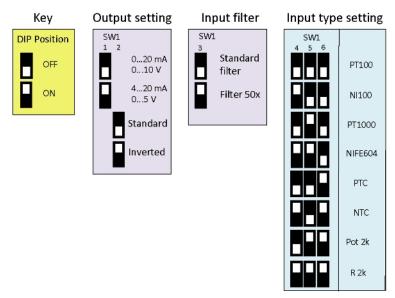

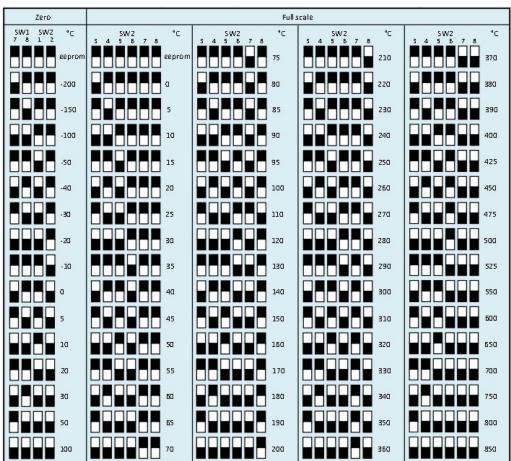


Table 1 - Setting the Scale field for Pt100, Pt1000, NI100, NIFE604

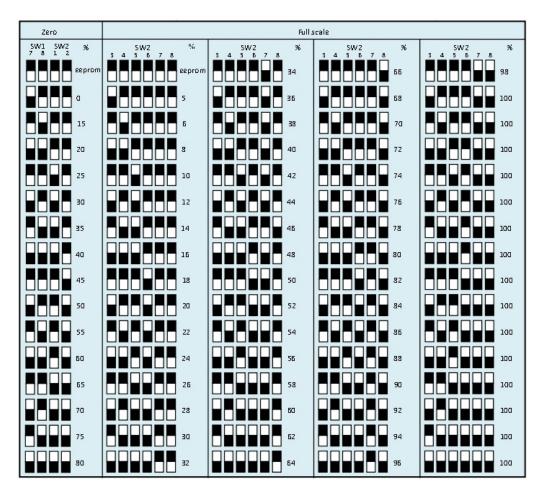


Table 2 - Setting the Scale field for the potentiometer

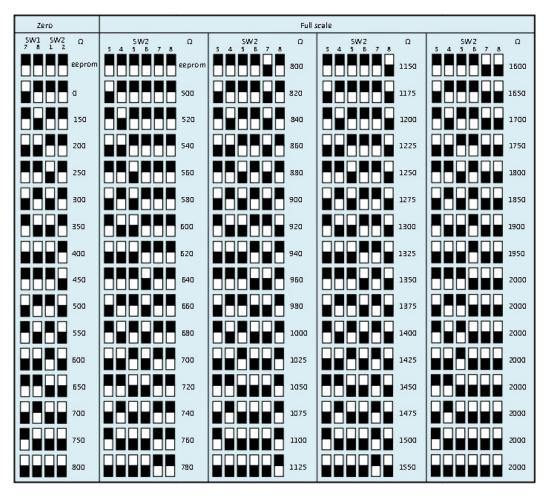


Table 3 - Setting the Scale field for the resistor < 2  $k\Omega$ 

# ORDERING DATA

The device comes pre-configured with the following parameters:

• Input type: PT100

• Temperature range: -200 ÷ 800 °C

• Output: 4-20 mA

Other configurations will be set by the final user.

When ordering, you can require the configuration of the device that will be provided at no extra charge. The order must show:

- Input Type
- Temperature range
- Output Type
- Output range

Example: TSEN-RT - PT100 - 0...200 °C - 0...10V